

Sur-Grip Connector

Wellhead Control Products, Inc. www.wellheadcontrol.com





SG Sur-Grip Connector

The WCP Sur-Grip is an OD tubing connector. The Sur-Grip connection uses a set of slips to lock onto the outside of the coiled tubing. It is a pressurized connection utilizing seals against the outside of the tubing. The connection can be an integral part of a downhole tool such as a wash nozzle or 1-way check suspended from the end of the coil string. It can also be used as an adapter (shown below) to connect threaded tools such as gas lifts in the middle of a string.


OD CONNECTION

ANY SIZE COIL

QUICK INSTALLATION

Installation Procedure

- 1. Secure the tubing if installing in the middle of the string. (False Bowl and slips)
- 2. Squarely part the tubing and clean all edges.
- 3. If used as an adapter to other tools, make up all threaded connections.
- 4. Remove the Cap and Slips from the body, and slide the Cap and then the Slips onto tube. Be sure to large end of the Slips are towards the body.
- 5. Slide the body on to the tube. Press it on past the seal until fully seated on the stop.
- 6. Slide the Slips against the Body.
- 7. Screw the cap on to the body and tighten securely.
- 8. If suspending more than the tool, pull against the connection to ensure proper hold.

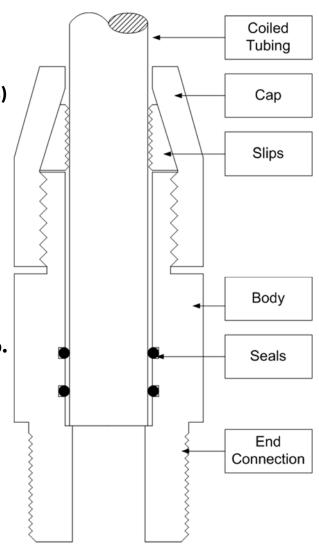



Wellhead Control Products, Inc.

501 N. Richey Pasadena, TX 77506 713.475.2283 800.457.1198

